



EROSION CONTROL NOTES (1014 Lakeshore)

1. This plan has been prepared by Pellettieri Associates, Inc. for site layout, fine grading details and landscape treatments. Additionally, Blakeman Engineering, Inc. has reviewed and designed erosion and sediment control practices for areas on the plan, lakeward of the existing driveway, and with areas of proposed land disturbance.
2. Once final plans have been developed for the new home, driveway and septic system construction then additional stormwater and erosion control plans can be created specially for that area of land disturbance.
3. Erosion control practices shall be installed and maintained in accordance with details on this plan and/or with BEST MANAGEMENT PRACTICES as outlined in the "NH Stormwater Manual, Volume 3, Erosion and Sediment Controls during Construction" dated December, 2008
4. Silt fence and any other erosion and sediment control measure shall be installed and shall be left in place and maintained as necessary until the site is fully stabilized. It is the contractors responsibility to inspect these measures periodically until the area above is stabilized, whether the contractor is actively working on-site or not, and always after any rainstorm of 1/2" or greater.
5. Disturbed areas not otherwise noted on the plan shall be stabilized with a 4" covering of screened loam and immediately seeded. Where slopes are steeper than 4:1 (horiz.:vert.), they shall be covered with North American Green erosion control matting (S75BN or equivalent) stapled in place according to the manufacturers requirements.
6. Contractor shall monitor weather and take any necessary temporary measures needed to prevent erosion and sediment transport. These measures can be such practices as small sediment basins or diversions constructed for overnight or over the weekend if rain is forecast.
7. It is the contractors sole responsibility to become familiar with all Town and NH DES permits issued for this project and to understand any conditions mandated by the Town and/or NH DES on these permits, whether this information is provided on project plans or not.



STATE OF NEW HAMPSHIRE
 PETER J. BLAKEMAN
 No. 8229
 PROFESSIONAL ENGINEER
 License No. 8229
 Peter J. Blakeman

L1
 Job No. _____
 Scale 1" = 10'
 Project **McEwee Residence**
 Title **Erosion & Sedimentation Control Plan**

PA PELLETTIERI ASSOCIATES, INC.
 LANDSCAPE ARCHITECTURE, CONSTRUCTION & FINE GARDENING
 169 KEARSARGE MOUNTAIN ROAD : WARNER, NH 03278 : (603)456-3678

Comie and Andrew McEwee
 104 & 1026 Lakeshore Drive
 New London, NH 03257

Date 20 Nov 18
 Revised _____
 Drawn by PA

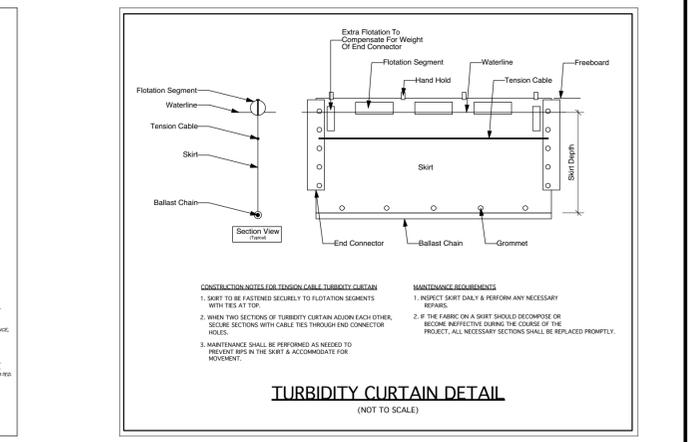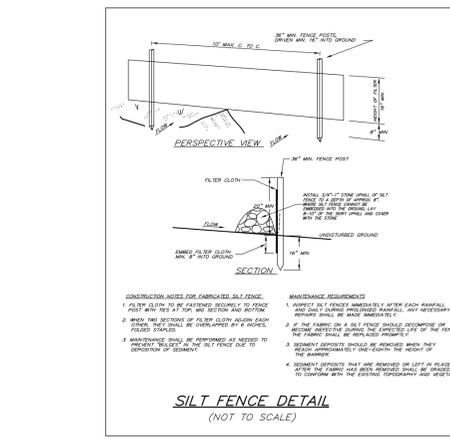

- EROSION CONTROL NOTES (1026 Lakeshore)**
1. This plan has been prepared by Pellettieri Associates, Inc. for site layout, fine grading details and landscape treatments. Additionally, Blakeman Engineering, Inc. has reviewed and designed erosion and sediment control practices for areas on the plan, lakeward of the existing driveway, and with areas of proposed land disturbance.
 2. Erosion control practices shall be installed and maintained in accordance with details on this plan and/or with BEST MANAGEMENT PRACTICES as outlined in the "NH Stormwater Manual, Volume 3, Erosion and Sediment Controls during Construction" dated December, 2008
 3. Silt fence and any other erosion and sediment control measure shall be installed and shall be left in place and maintained as necessary until the site is fully stabilized. It is the contractors responsibility to inspect these measures periodically until the area above is stabilized, whether the contractor is actively working on-site or not, and always after any rainstorm of 1/2" or greater.
 4. Disturbed areas not otherwise noted on the plan shall be stabilized with a 4" covering of screened loam and immediately seeded. Where slopes are steeper than 4:1 (horiz.:vert.), they shall be covered with North American Green erosion control matting (S75BN or equivalent) stapled in place according to the manufacturers requirements.
 5. Contractor shall monitor weather and take any necessary temporary measures needed to prevent erosion and sediment transport. These measures can be such practices as small sediment basins or diversions constructed for overnight or over the weekend if rain is forecast.
 6. It is the contractors sole responsibility to become familiar with all Town and NH DES permits issued for this project and to understand any conditions mandated by the Town and/or NH DES on these permits, whether this information is provided on project plans or not.